



Athena Computer Power Corp.

AP-PS2MK12P868

Meet 80 Plus Platinum

Active PFC Circuit / Full Range Input

Safety Meet 62368



US. Corporate Office
921 Canada Court
City of Industry, CA 91748
Tel: (626) 810-5008
Fax: (626)810-5555
www.athenapower.com

03/31/2025

MODEL: AP-PS2MK12P868

Revision History

<u>Rev</u>	<u>Description</u>	<u>Date</u>	<u>Author</u>
0.0	Original	2025.3.31	T.K.

1. GENERAL DESCRIPTION AND SCOPE

This is the specification of Model AP-PS2MK12P868 power supply; AC-line powered switching power supply with active PFC (Power Factor Correction) circuit, meet EN61000-3-2 and with Full Range Input features.

The power supply with an PS2 form-factor and 1200Watts outputs power, +5V standby voltage, remote on/off control, and forced air cooling characteristics.

The specification below is intended to describe as detailed as possible the functions and performance of the subject power supply. Any comment or additional requirements to this specification from our customers will be highly appreciated and treated as a new target for us to approach.

2. REFERENCE DOCUMENTS

The subject power supply will meet the EMI requirements and obtain main safety approvals as following:

2.1 EMI REGULATORY

- FCC Part 15 Subpart, Class 'B' 120 Vac operation.
- CISPR 22 Class 'B' 230 Vac operation.

3. PHYSICAL REQUIREMENTS

3.1 MECHANICAL SPECIFICATIONS

The mechanical drawing of the subject power supply, which indicate the form factor, location of the mounting holes, location, the length of the connectors, and other physical specifications of the subject power supply. Please refer to the attachment drawing.

4. ELECTRICAL REQUIREMENTS

4.1 OUTPUT ELECTRICAL REQUIREMENTS

The subject power supply will meet all electrical specifications below, over the full operation temperature range and dynamic load regulation.

4.1.1. OUTPUT RATING

Output	Nominal	Regulation	Ripple/Noise	Min	Max
1	+3.3V	$\pm 5\%$	50mV	0 A	18.0 A
2	+5V	$\pm 5\%$	50mV	0 A	18.0 A
3	+12V	$\pm 5\%$	120mV	0A	100.0A
4	-12V	$\pm 10\%$	120mV	0 A	0.5 A
5	+5VSB	$\pm 5\%$	50mV	0 A	3.0A

- (1) The +3.3V and +5V total output shall not exceed 120watts.
- (2) total output for this subject power supply is 1200 watts.
- (3) Ripple and noise measurements shall be made under all specified load conditions through a single pole low pass filter with 20MHz cutoff frequency. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

4.1.2. STANDBY STATE

When the power supply is in standby mode; only the 5VSB output is powered on, the power supply should meet the following requirements for meet Energy Star* and to help reduce power in server systems.

Standby State Efficiency

Load	Efficiency
45mA	$\geq 45\%$ Complies with specification
550mA	$\geq 55\%$ Complies with specification
$\geq 1A$	$\geq 70\%$ Complies with specification

4.1.3. HOLD-UP TIME (@FULL LOAD)

115V / 60Hz: 12m Sec. Minimum.

230V / 50Hz: 12m Sec. Minimum.

4.1.4. OUTPUT RISE TIME

(10% TO 90% OF FINAL OUTPUT VALUE, @FULL LOAD)

115V-rms or 230V-rms + 5Vdc: 20ms Maximum

4.1.5. OVER VOLTAGE PROTECTION

Voltage Source	Protection Point
+ 3.3 V _{dc}	3.7V-4.5V
+5V _{dc}	5.7V-7.0V
+12V _{dc}	13.4V-16.0V

4.1.6. SHORT CIRCUIT PROTECTION

Output short circuit is defined to be a short circuit load of less than 0.1 ohm.

In the event of an output short circuit condition on +3.3V, +5V or +12V output, the power supply will shut down and latch off without damage to the power supply. The power supply shall return to normal operation after the short circuit has been removed and the power switch has been turned off for no more than 2 seconds.

In the event of an output short circuit condition on -12V output, the power supply will not be damaged. The power supply shall return to normal operation as soon as the short circuit has been removed. and the power switch has been turned off for no more than 2 seconds.

4.1.7. OVER CURRENT PROTECTION

	O. C. P
+5V	25-35A
+3.3V	25-35A
+12V	NA

4.1.8. POWER GOOD SIGNAL


The power good signal is a TTL compatible signal for the purpose of initiating an orderly start-up procedure under normal input operating conditions. This signal is asserted (low) until +5Vdc has reached 4.75 volts during power up. Characteristics:

TTL signal asserted (low state) : less than 0.5V while sinking 10mA.

TTL signal asserted (high state): greater than 4.75V while sourcing 500uA.

High state output impedance: less or equal to 1Kohm from output to common.

POWER GOOD @ 115/230V, FULL LOAD	100 –500mSec.
POWER FAIL @115/230V, FULL LOAD	1m Sec. minimum

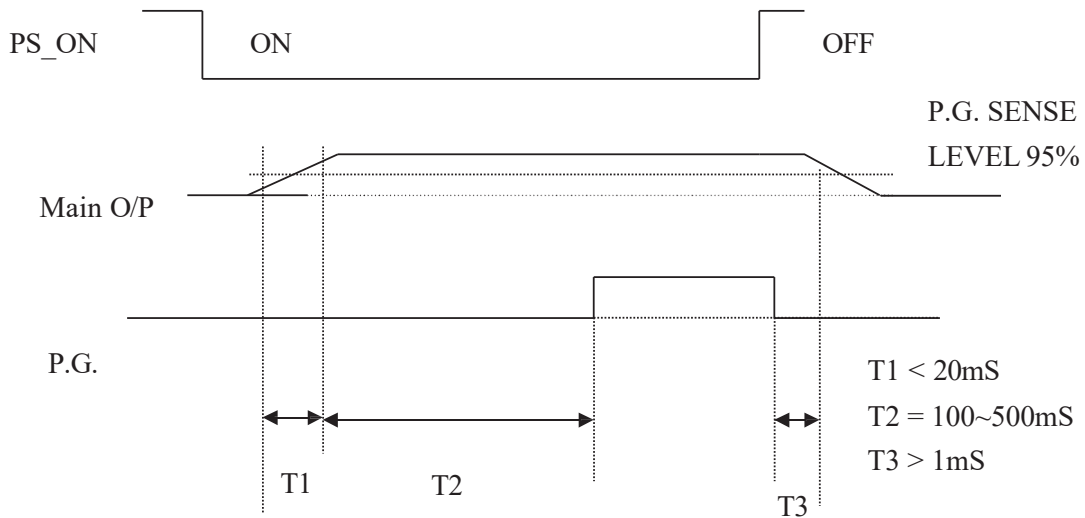

4.2 Transient Load Requirement

Output	Δ Step Load Size	Load Slew Rate	Capacitive Load
+3.3V	30% of max load	0.5 A/ μ s	3300 μ F
+5V	30% of max load	0.5 A/ μ s	3300 μ F
+12V	65% of max load	1.0 A/ μ s	6600 μ F
+5Vsb	25% of max load	0.5 A/ μ s	330 μ F

4.3. INPUT ELECTRICAL SPECIFICATIONS

4.3.1. VOLTAGE RANGE

PARAMETER		UNITS
V-in Range	100 - 264	V-rms

4.3.2. INPUT FREQUENCY

INPUT FREQUENCY	47–63Hz
-----------------	---------

4.3.3. INRUSH CURRENT

(Cold start – 25 deg. C)

110V	40A
240V	80A

(No damage)

4.3.4. INPUT LINE CURRENT

110V	13.0 Amps – rms maximum
240V	6.0 Amps – rms maximum

4.4. EFFICIENCY

	Full load (100%)	Typical load (50%)	Light load (20%)
115VAC	89%	92%	90%

4.5. Standby Power Consumption (5Vsb):

Efficiency > 40% @ 5Vsb/45mA & 230Vac input

Efficiency > 55% @ 5Vsb/550mA & 230Vac input

Efficiency > 70% @ 5Vsb/1A & 230Vac input

Efficiency > 70% @ 5Vsb/3A & 230Vac input

4.6. PS_ON#

PS_ON# is an active-low, TTL-compatible signal that allows a motherboard to remotely control the power supply in conjunction with features such as soft on/off, Wake on LAN+, or wake-on-modem.

When PS_ON# is pulled to TTL low, the power supply should turn on the five main DC output rails: +12VDC, +5VDC, +3.3VDC, -5VDC, and -12VDC. When PS_ON# is pulled to TTL high or open-circuited, the DC output rails should not deliver current and should be held at zero potential with respect to ground. PS_ON# has no effect on the +5VSB output, which is always enabled whenever the AC power is present. Table 15 lists PS_ON# signal characteristics.

The power supply shall provide an internal pull-up to TTL high. The power supply shall also provide debounce circuitry on PS_ON# to prevent it from oscillating on/off at startup when activated by a mechanical switch. The DC output enable circuitry must be SELV-compliant.

Table 15. PS_ON# Signal Characteristics

	Min.	Max.
VIL, Input Low Voltage	0.0V	0.8V
IIL, Input Low Current (Vin = 0.4V)		-1.6mA
VIH, Input High Voltage (lin = -200μA)	2.0V	
VIH OPEN circuit, lin = 0		5.25V

5. ENVIRONMENTAL REQUIREMENTS

The power supply will be compliant with each item in this specification for the following Environmental conditions.

5.1. TEMPERATURE RANGE

Operating	1200W	0 to +50 deg. C
Storage		-20 to +80 deg. C

5.2. HUMIDITY

Operating	5 –85% RH, Non-condensing
Storage	5 –95% RH, Non-condensing

5.3. VIBRATION

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Vibration Operating – 0.01g²/ Hz at 5 Hz, sloping to 0.02g²/ Hz at 20 Hz, and maintaining 0.02g²/ Hz from 20Hz to 500Hz. The area under the PSD curve is 3.13gRMS. The duration shall be 20 minutes per axis for all three axes on all samples.

Plane of vibration to be along three mutually perpendicular axes.

5.4. SHOCK

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Storage 40G, 9m Sec. half-sine wave pulse in both directions on three mutually perpendicular axes.

Operating 10G, 11mSec. half-sine wave pulse in both directions on three mutually Perpendicular axes.

6. SAFETY

6.1 UL62368 Certified

6.2. LEAKAGE CURRENT

The leakage current from AC to safety ground will not exceed 3.5 mA-rms at 264Vac, 63 Hz.

7. ELECTROMAGNETIC COMPATIBILITY

7.1. RADIATED EMI

The subject power supply will meet FCC and CISPR 22 requirements under normal load conditions.

8. LABELLING

Label marking will be permanent, legible and complied with all agency requirements.

8.1. MODEL NUMBER LABEL

Labels will be affixed to the sides of the power supply showing the following:

- Manufacturer's name and logo.
- Model no., serial no., revision level, location of manufacturer.
- The total power output and the maximum load for each output.
- AC input rating.

8.2. DC OUTPUT IDENTIFICATION


Each output connector will be labeled.

9. RELIABILITY






9.1. MTBF

The power supply has a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC input voltage.

ACPC-PS2-1200W

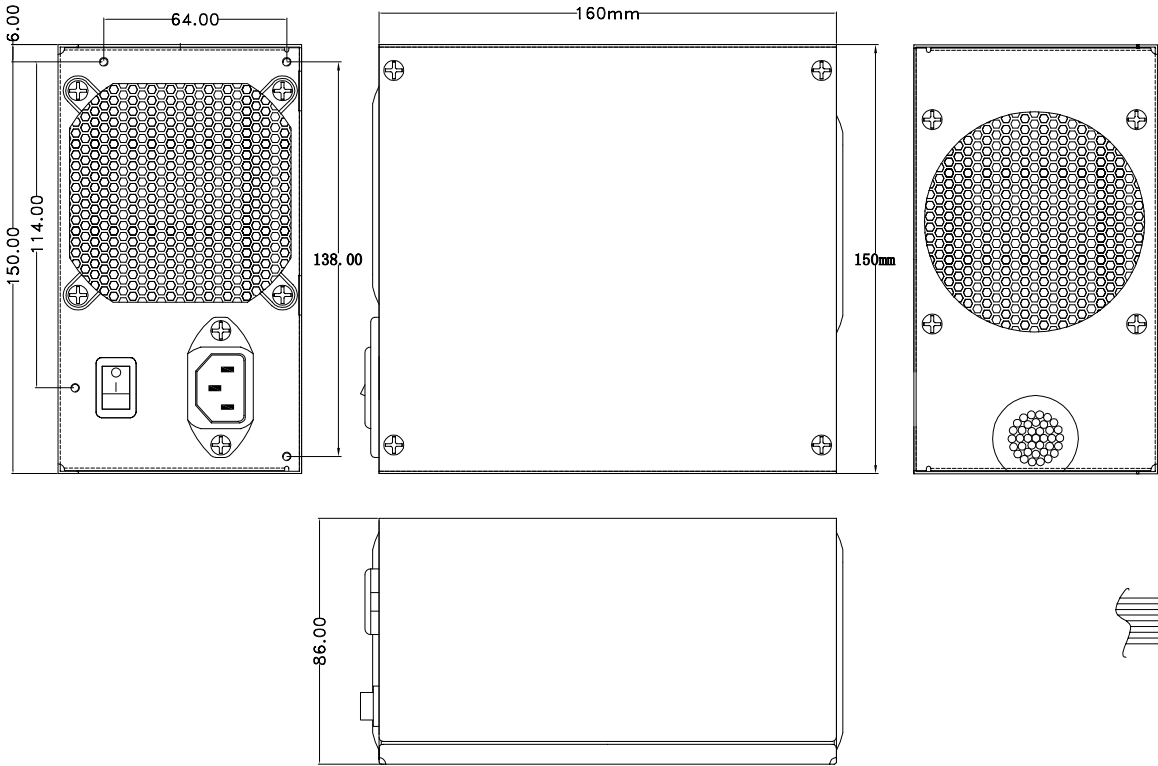

*所有DC输出线都为黑色排线！

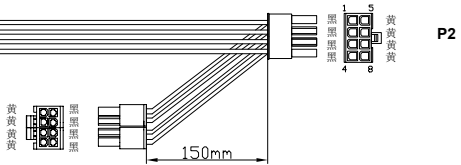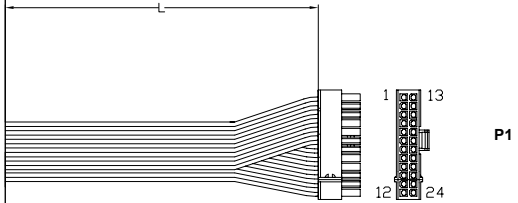

REF ID	PIN ON	WIRE COLOR	SIGNAL	CABLE LENGTH
P1	24	BLK	GND	500 ± 20mm
	23	RED	+5V	
	22	RED	+5V	
	21	RED	+5V	
	20			
	19	BLK	GND	
	18	BLK	GND	
	17	BLK	GND	
	16	GREEN	PS-ON	
	15	BLK	GND	
	14	BLUE	-12V	
	13	BROWN	+3.3VS	
	12	ORANGE	+3.3V	
P2	11	YEL	+12V1	500 ± 20mm
	10	YEL	+12V1	
	9	PURPLE	+5VSB	
	8	GRAY	P.G	
	7	BLK	GND	
	6	RED	+5V	
	5	BLK	GND	
	4	RED	+5V	
	3	BLK	GND	
	2	ORANGE	+3.3V	
	1	ORANGE	+3.3V	
	8	YEL	+12V	
	7	YEL	+12V	
P3	6	YEL	+12V	500 ± 20mm
	5	YEL	+12V	
	4	BLK	GND	
	3	BLK	GND	
	2	BLK	GND	
	1	BLK	GND	
	12	BLK	GND	
	11	BLK	GND	
	10	BLK	GND	
	9	BLK	GND	
	8	BLK	GND	
	7	BLK	GND	
	6	YEL	GND	
P4	5	YEL	GND	500 ± 20mm
	4	YEL	+12V	
	3	YEL	+12V	
	2	YEL	+12V	
	1	YEL	+12V	
	S4	BLK	GND	
	S3	BLK	GND	
	S2	NC		
	S1	NC		
	8	BLK	GND	
	7	BLK	GND	
	6	BLK	GND	
	5	BLK	GND	
P5	4	BLK	GND	500 ± 20mm
	3	YEL	+12V2	
	2	YEL	+12V2	
	1	YEL	+12V2	
	5	YEL	+12V1	
	4	BLK	GND	
	3	RED	+5V	
	2	BLK	GND	
	1	ORANGE	+3.3V	
	5	YEL	+12V1	
	4	BLK	GND	
	3	RED	+5V	
	2	BLK	GND	
P6	1	ORANGE	+3.3V	350 ± 20mm
	2	BLK	GND	
	3	RED	+5V	
	4	BLK	GND	
	5	YEL	+12V1	
	6	YEL	+12V2	
	7	BLK	GND	
	8	BLK	GND	
	9	BLK	GND	
	10	BLK	GND	
	11	BLK	GND	
	12	BLK	GND	
	13	BLK	GND	
P7	1	ORANGE	+3.3V	350 ± 20mm
	2	BLK	GND	
	3	RED	+5V	
	4	BLK	GND	
	5	YEL	+12V1	
	6	YEL	+12V2	
	7	BLK	GND	
	8	BLK	GND	
	9	BLK	GND	
	10	BLK	GND	
	11	BLK	GND	
	12	BLK	GND	
	13	BLK	GND	

客户	Athena Power	品名	PS2	型号	
比例	合适化	单位	mm	材质	SECC T=0.8
绘图	James liu	审核		处理	
投影		版本	Rev1.3	日期	2025.4.1